


DISCOVER NEW, EXTREME GENERATION OF REFERENCE STANDARD

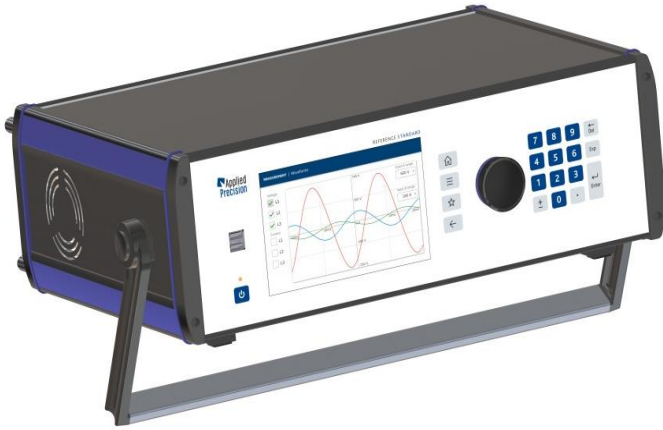

Some product highlights

- Highest accuracy in its class up to 0.005% (50 ppm)
- Measuring range 0.1 mA to 120 A and 0.1 V to 600 V
- 24-bit / 125 ks/s sampling rate
- Harmonics and inter harmonics up to 200th harmonic
- Current and voltage inputs designed for safety category CAT IV / 300V
- Four independent fully programmable impulse outputs
- Any programmable constant
- Available models:

Single phase	Class	Max. current
RS 3130E	0,02	120A
RS 3130S	0,01	120A

Three phase	Class	Max. current
RS 3330E	0,02	120A
RS 3330S	0,01	120A

Complete product information already available at www.appliedp.com

For price offers and orders, contact us at sales@appliedp.com